

TRAILER COURTS

BEECH LANE

100'

Elev. 95'

Drawing showing the existing conditions of the Willard Van Slyke Trailer Court, which you ordered closed down on or about Jan. 19, 1965. The detail shown here was furnished by Mr. Van Slyke, and is being forwarded to your Board for the purpose of receiving information pertaining to the revamping and correcting certain conditions, in order to meet the necessary regulations covering the running and maintaining the said Trailer Court as mentioned above.

John T. Spletter
Civil Engineer & Surveyor

N
E

221'

Macadam Road

10'

79'

35'
Trailer
35'

5' x 6 1/2'

well house

13'

7'

100 ft. to neighbor's well

100 ft. well - 25 ft. casing
water shut off valve to each unit

200 Watt Light

47'

Glass Sewer

1" Water Line
in same ditch
as sewer

50'

Empty
Trailer space

62'

Septic Tank = 2000 Gallons - 6' x 11'

4" Fiber

50'
Trailer

25'

35'

5" field tile

25'

10'


30'

100'

Elev. 90' ±

Notes:-

Septic Tank Outlet = 8" below Inlet
" " " " 4' deep
Field Tile = 30" deep with 18"
Gravel below
Electric Power Pump in Well House

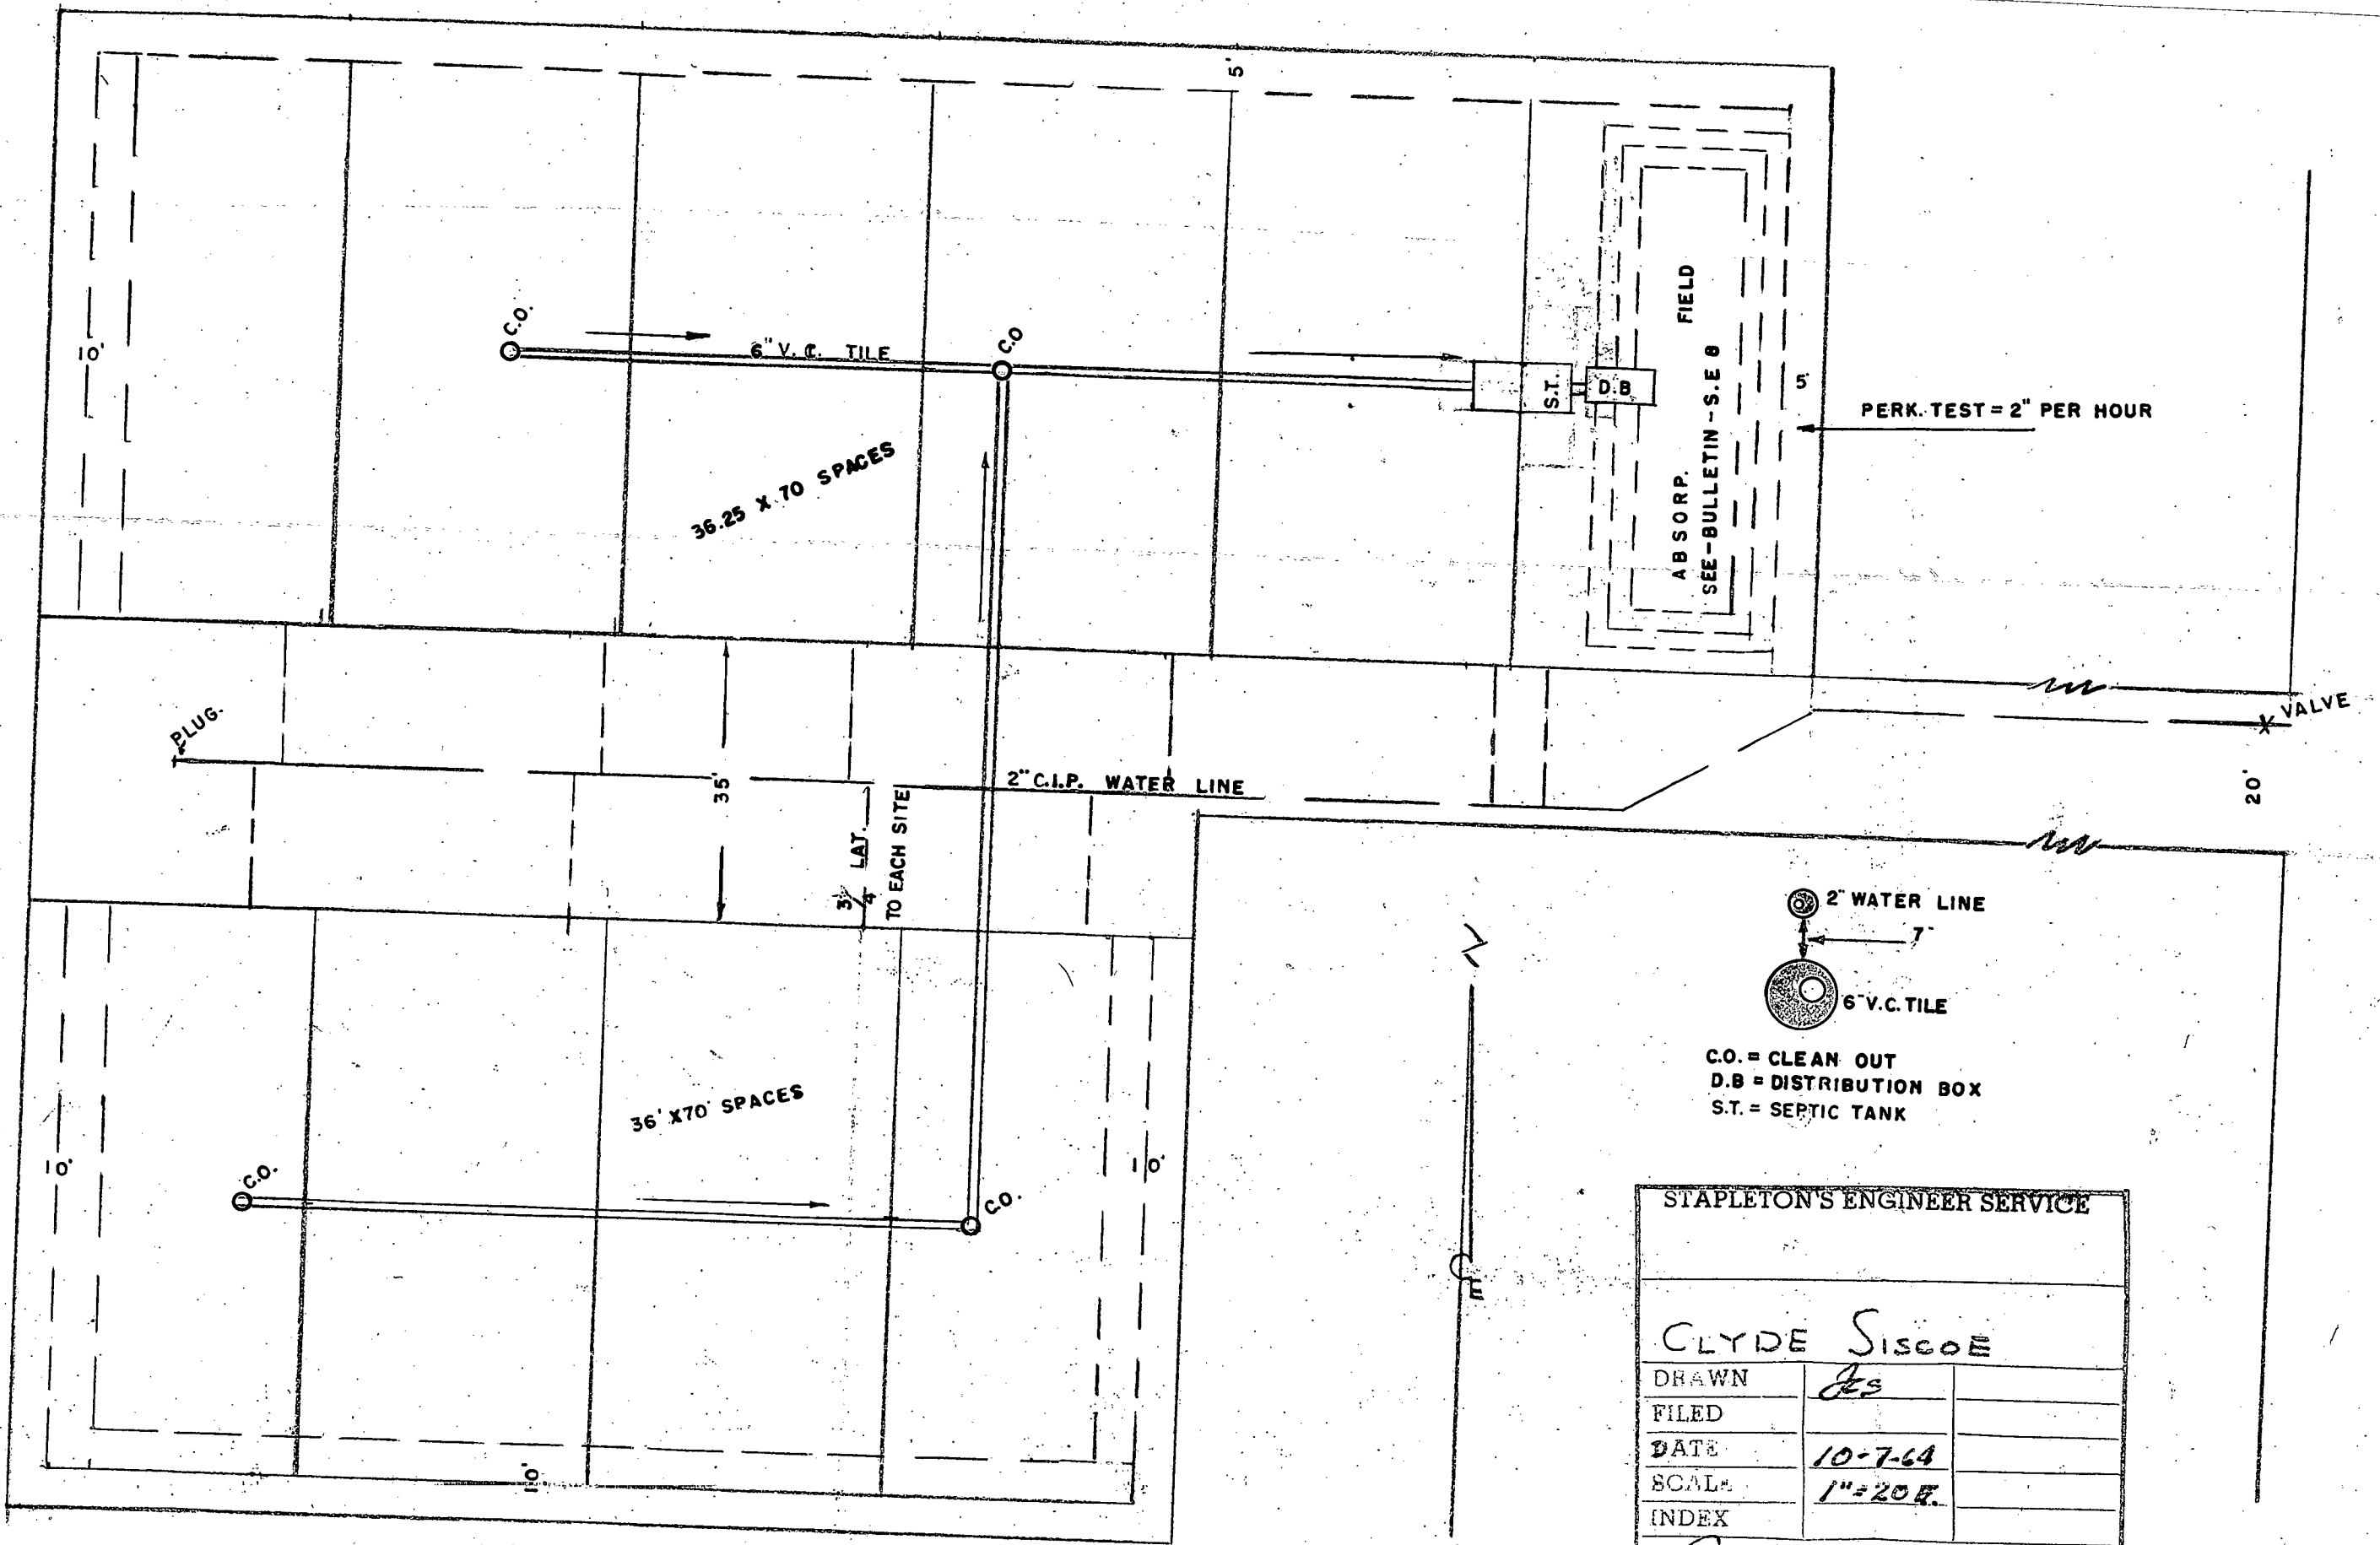

C.O. = CLEAN OUT
 D.B. = DISTRIBUTION BOX
 S.T. = SEPTIC TANK

STAPLETON'S ENGINEER SERVICE

CLYDE SISCOE

DRAWN

JS

FILED

DATE

10-7-64

SCALE

1" = 20'

INDEX

John T. Stapleton
SIGNATURE